
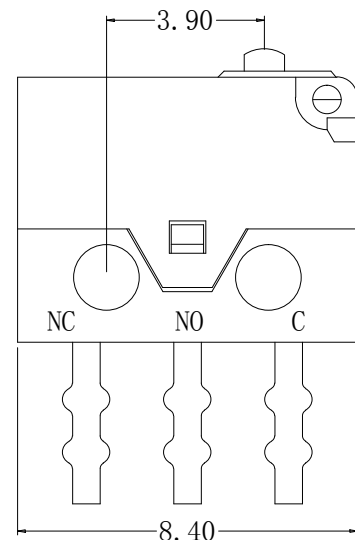
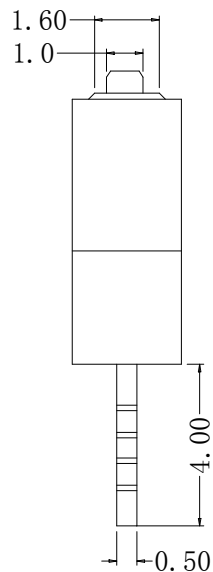
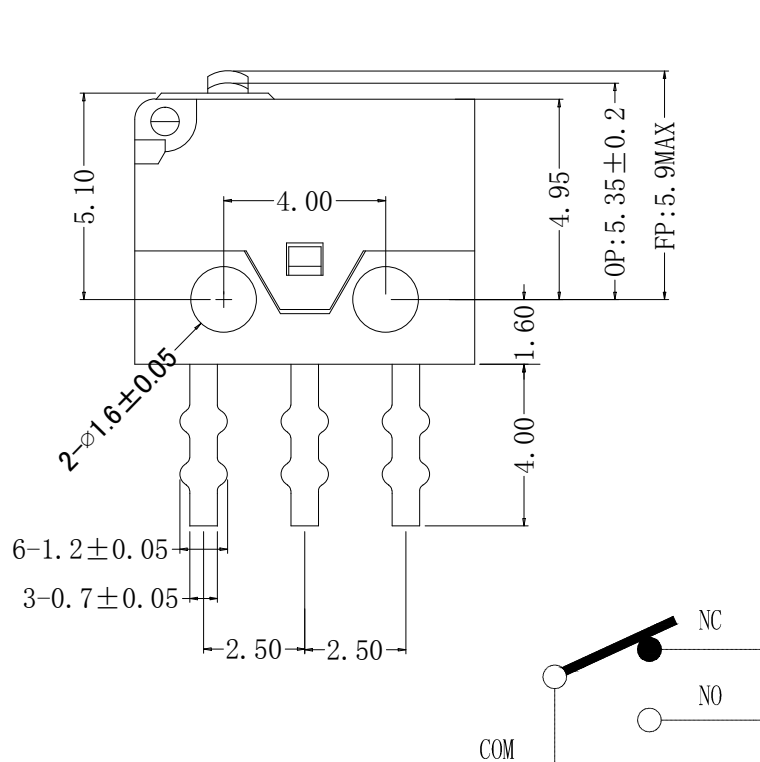


Rating	DC30V 0.1A	Electrical Life	300,000 cycles
Contact Resistance	100mΩ Max	Mechanical Life	300,000 cycles
Insulation Resistance	>100MΩ DC500V	Ambient Temper. Used	-25℃ to +85℃
Withstand Voltage	AC250V 1min.	Ambient Humidity Used	≤85% at +40℃
Soldering Temper.	235±5℃ 5s	Operating Force	90gf max



6	端子 (TERMINAL)	3	C2680 (Brass)	镀银 (Silver plating)
5	触点 (CONTACT)	1	银合金 (Silver Alloy)	镀金 (Gilding)
4	按钮 (BUTTON)	1	PBT	
3	弹片 (SPRING)	1	C17200 (Beryllium copper)	
2	盖片 (COVER)	1	PBT	
1	底座 (BASE)	1	尼龙 (Nylon)	白色 (Black)
序号 NO.	零件名称 Part Name	数量 Quantity	材质 Material	备注 Notes

制图 DRAWIN			东莞市德沃电子科技有限公司		
设计 DESIGN			超小型微动开关 (2.7井深)		
审核 CHECKED			比例 SCALE	4:1	名称 TITLE
核准 APPROVE			张数 SHEET	1/1	料号 P/N NO.
一般公差 TOLERANCE	10<L<20	±0.20	单位 UNIT	mm	模具编号 P/N NO.
	6<L<10	±0.15	角度 ANGLES	±2.0°	纸张 SIZE
	1<L<6	±0.10			A4
	L<1	±0.05			角法 P R O J.
版本 REV.	ECN 编号 ECN NO.	日期 DATE	变更内容 DEFINITION	修改 DRAW	核准 APPROVE